



CRM4系列、CRM6系列矩形电连接器

产品简介

- 符合MIL-C-55302, 对应GJB1438A标准
- 耐波峰焊
- 1.905mm接点间距
- 4排有86、110、204、250、276芯
- 6排有204、252、300、360、402、448芯
- 执行企业标准: Q/21EJ1036



用途及使用环境

产品用于实现机箱内部, 印制板与印制板之间, 以及印制板与线缆之间信号的传输。广泛应用于航天、航空、电子、兵器、船舶等行业的机箱、机柜内部。

主要技术性能

- 工作温度: $-65^{\circ}\text{C} \sim 125^{\circ}\text{C}$
- 额定电流: 3A
- 接触电阻: $\leq 0.025\Omega$
- 介质耐压: 标准大气压 750V; 低气压状态 250V
- 绝缘电阻: 常温 $\geq 5000\text{M}\Omega$; 湿热 $\geq 20\text{M}\Omega$
- 机械寿命: 1000次
- 振动: 10~2000Hz, 加速度 147m/s^2
- 盐雾: 48小时
- 冲击: 加速度 980m/s^2

型号命名

系列主称	CRM-接点间距为1.905mm的矩形电连接器	6	7	2-	360-	31	1-	9500
接触件排数	4-四排 6-六排							
结构类型	见表一							
绝缘体材料	2-PPS (聚苯硫醚)							
接触件芯数	统一用三位阿拉伯数字表示, 见表二							
接触件及端接形式	见表三							
接触件镀层	插头: 1-镀金; 2-镀锡 插座: 1-镀金; 2-镀锡							
安装紧固件类型	见“CRM系列可以安装的可以识别紧固件类型”							

表一

插头			标记代号	插座			标记代号
CRM4	直印制板式		1	CRM4	直印制板式		2
	弯印制板式		5		弯印制板式		6
CRM6	直印制板式	芯数>402	1	CRM6	直印制板式	芯数>402	2
		芯数≤402	3			芯数≤402	4
	弯印制板式	芯数>402	5		弯印制板式	芯数>402	6
		芯数≤402	7			芯数≤402	8



表二

4排	086、110、164、204、220、250、276、300、404
6排	162、204、252、300、360、402、448

表三

用于插头	标记代号	用于插座	标记代号
插针，直式浸焊， $2.77 \times \Phi 0.45$	51	插孔，直式浸焊， $2.77 \times \Phi 0.45$	81
插针，直式浸焊， $3.56 \times \Phi 0.45$	52	插孔，直式浸焊， $3.56 \times \Phi 0.45$	82
插针，直式浸焊， $4.37 \times \Phi 0.45$	53	插孔，直式浸焊， $4.37 \times \Phi 0.45$	83
插针，直式浸焊， $6.35 \times \Phi 0.45$	54	插孔，直式浸焊， $6.35 \times \Phi 0.45$	75
插针，弯式浸焊， $2.77 \times \Phi 0.5$	31	插孔，弯式浸焊， $2.77 \times \Phi 0.5$	84
插针，弯式浸焊， $3.56 \times \Phi 0.5$	32	插孔，弯式浸焊， $3.56 \times \Phi 0.5$	85
插针，弯式浸焊， $4.37 \times \Phi 0.5$	33	插孔，弯式浸焊， $4.37 \times \Phi 0.5$	86
插针，弯式浸焊， $6.35 \times \Phi 0.5$	34		

注：1、接触件的长度(L)需要根据印制板厚度(h)进行选择，为保证焊接可靠性 $L-h \geq 1\text{mm}$ 。

2、紧固件选择时，插头只能装配导销，插座只能装配导套，选型时请注意。

3、插头、插座安装固定时扭矩力为 $0.15 \sim 0.25\text{N} \cdot \text{m}$ 。



插头 CRM452 - 164 - 312-9501
 插座 CRM422 - 164 - 832-9601
 XXXXXX - XXX - XXX-XXXX

插头	插座
系列主称	
CRM 1.905mm间距矩形插头	CRM 1.905mm间距矩形插座
绝缘体	
4 四排	4 四排
绝缘体类型: 5 插头, 弯式带安装耳	绝缘体类型: 2 插座, 直式带安装耳
绝缘体材料: 2 PPS(聚苯硫醚)	绝缘体材料: 2 PPS(聚苯硫醚)
接触件芯数	
086、110、164、204、220、 250、276、300、404	086、110、164、204、220、 250、276、300、404
接触件形式	
端接形式 31 插针, 弯式印制板浸焊, $2.77 \times \Phi 0.5$ 32 插针, 弯式印制板浸焊, $3.56 \times \Phi 0.5$ 33 插针, 弯式印制板浸焊, $4.37 \times \Phi 0.5$ 34 插针, 弯式印制板浸焊, $6.35 \times \Phi 0.5$	端接形式 81 插孔, 直式印制板浸焊, $2.77 \times \Phi 0.45$ 82 插孔, 直式印制板浸焊, $3.56 \times \Phi 0.45$ 83 插孔, 直式印制板浸焊, $4.37 \times \Phi 0.45$ 75 插孔, 直式印制板浸焊, $6.35 \times \Phi 0.45$
接触件镀层	
1 镀金 2 镀锡(仅适用于印制板浸焊)	1 镀金 2 镀锡(仅适用于印制板浸焊)
安装紧固件类型	
0256 空 9000 两个固定引导导销, 安装 9500 两个固定识别导销, 不安装 9501~9536 两个固定识别导销, 安装	0256 空 9100 两个固定引导导套, 安装 9600 两个固定识别导套, 不安装, 尾杆 #2-56 $\times$ 8.12 9601~9636 两个固定识别导套, 安装, 尾杆 #2-56 $\times$ 8.12 9700 两个固定识别导套, 不安装, 尾杆 #2-56 $\times$ 6.27 9701~9736 两个固定识别导套, 安装, 尾杆 #2-56 $\times$ 6.27

CRM4系列、CRM6系列矩形电连接器



插头 CRM412 - 164 - 522-9501

插座 CRM462 - 164 - 852-9601
XXXXXX - XXX - XXX-XXXX

插头	插座
系列主称	
CRM 1.905mm间距矩形插头	CRM 1.905mm间距矩形插座
绝缘体	
4 四排	4 四排
绝缘体类型：1 插头，直式带安装耳	绝缘体类型：6 插座，弯式带安装耳
绝缘体材料：2 PPS(聚苯硫醚)	绝缘体材料：2 PPS(聚苯硫醚)
接触件芯数	
086、110、164、204、220、 250、276、300、404	086、110、164、204、220、 250、276、300、404
接触件形式	
端接形式	端接形式
51 插针，直式印制板浸焊，2.77×Φ0.45	84 插孔，弯式印制板浸焊，2.77×Φ0.5
52 插针，直式印制板浸焊，3.56×Φ0.45	85 插孔，弯式印制板浸焊，3.56×Φ0.5
53 插针，直式印制板浸焊，4.37×Φ0.45	86 插孔，弯式印制板浸焊，4.37×Φ0.5
54 插针，直式印制板浸焊，6.35×Φ0.45	
接触件镀层	
1 镀金	1 镀金
2 镀锡(仅适用于印制板浸焊)	2 镀锡(仅适用于印制板浸焊)
安装紧固件类型	
0256 空	0256 空
9000 两个固定引导导销，安装， 尾杆#2-56×8.12	9100 两个固定引导导套，安装
9500 两个固定识别导销，不安装， 尾杆#2-56×8.12	9700 两个固定识别导套，不安装
9501~9536 两个固定识别导销，安装， 尾杆#2-56×8.12	9701~9736 两个固定识别导套，安装



插头 CRM672 - 252 - 312-9501

插座 CRM642 - 252 - 812-9601

XXXXXX - XXX - XXX-XXXX

插头	插座
系列主称	
CRM 1.905mm间距矩形插头	CRM 1.905mm间距矩形插座
绝缘体	
6 六排	6 六排
绝缘体类型: 7 插头, 弯式带安装耳	绝缘体类型: 4 插座, 直式带安装耳
绝缘体材料: 2 PPS(聚苯硫醚)	绝缘体材料: 2 PPS(聚苯硫醚)
接触件芯数	
162、204、252、300、360、402	162、204、252、300、360、402
接触件形式	
端接形式	端接形式
31 插针, 弯式印制板浸焊, $2.77 \times \Phi 0.5$	81 插孔, 直式印制板浸焊, $2.77 \times \Phi 0.45$
32 插针, 弯式印制板浸焊, $3.56 \times \Phi 0.5$	82 插孔, 直式印制板浸焊, $3.56 \times \Phi 0.45$
33 插针, 弯式印制板浸焊, $4.37 \times \Phi 0.5$	83 插孔, 直式印制板浸焊, $4.37 \times \Phi 0.45$
34 插针, 弯式印制板浸焊, $6.35 \times \Phi 0.5$	75 插孔, 直式印制板浸焊, $6.35 \times \Phi 0.45$
接触件镀层	
1 镀金	1 镀金
2 镀锡(仅适用于印制板浸焊)	2 镀锡(仅适用于印制板浸焊)
安装紧固件类型	
0256 空	0256 空
9000 两个固定引导导销, 安装	9100 两个固定引导导套, 安装
9500 两个固定识别导销, 不安装	9600 两个固定识别导套, 不安装,
9501~9536 两个固定识别导销, 安装	尾杆 #2-56×8.12
	9601~9636 两个固定识别导套, 安装,
	尾杆 #2-56×8.12
	9700 两个固定识别导套, 不安装,
	尾杆 #2-56×6.27
	9701~9736 ,两个固定识别导套, 安装,
	尾杆 #2-56×6.27



插头 CRM632 - 252 - 522-9501


插座 CRM682 - 252 - 852 - 9701
XXXXXX - XXX - XXX-XXXX

插头	插座
系列主称	
CRM 1.905mm间距矩形插头	CRM 1.905mm间距矩形插座
绝缘体	
6 六排	6 六排
绝缘体类型: 3 插头, 直式带安装耳	绝缘体类型: 8 插座, 弯式带安装耳
绝缘体材料: 2 PPS(聚苯硫醚)	绝缘体材料: 2 PPS(聚苯硫醚)
接触件芯数	
162、204、252、300、360、402	162、204、252、300、360、402
接触件形式	
端接形式	端接形式
51 插针, 直式印制板浸焊, $2.77 \times \Phi 0.45$	84 插孔, 弯式印制板浸焊, $2.77 \times \Phi 0.5$
52 插针, 直式印制板浸焊, $3.56 \times \Phi 0.45$	85 插孔, 弯式印制板浸焊, $3.56 \times \Phi 0.5$
53 插针, 直式印制板浸焊, $4.37 \times \Phi 0.45$	86 插孔, 弯式印制板浸焊, $4.37 \times \Phi 0.5$
54 插针, 直式印制板浸焊, $6.35 \times \Phi 0.45$	
接触件镀层	
1 镀金	1 镀金
2 镀锡(仅适用于印制板浸焊)	2 镀锡(仅适用于印制板浸焊)
安装紧固件类型	
0256 空	0256 空
9000 两个固定引导导销, 安装, 尾杆#2-56×8.12	9100 两个固定引导导套, 安装
9500 两个固定识别导销, 不安装, 尾杆#2-56×8.12	9700 两个固定识别导套, 不安装
9501~9536 两个固定识别导销, 安装, 尾杆#2-56×8.12	9701~9736 两个固定识别导套, 安装



CRM4系列

直式插头

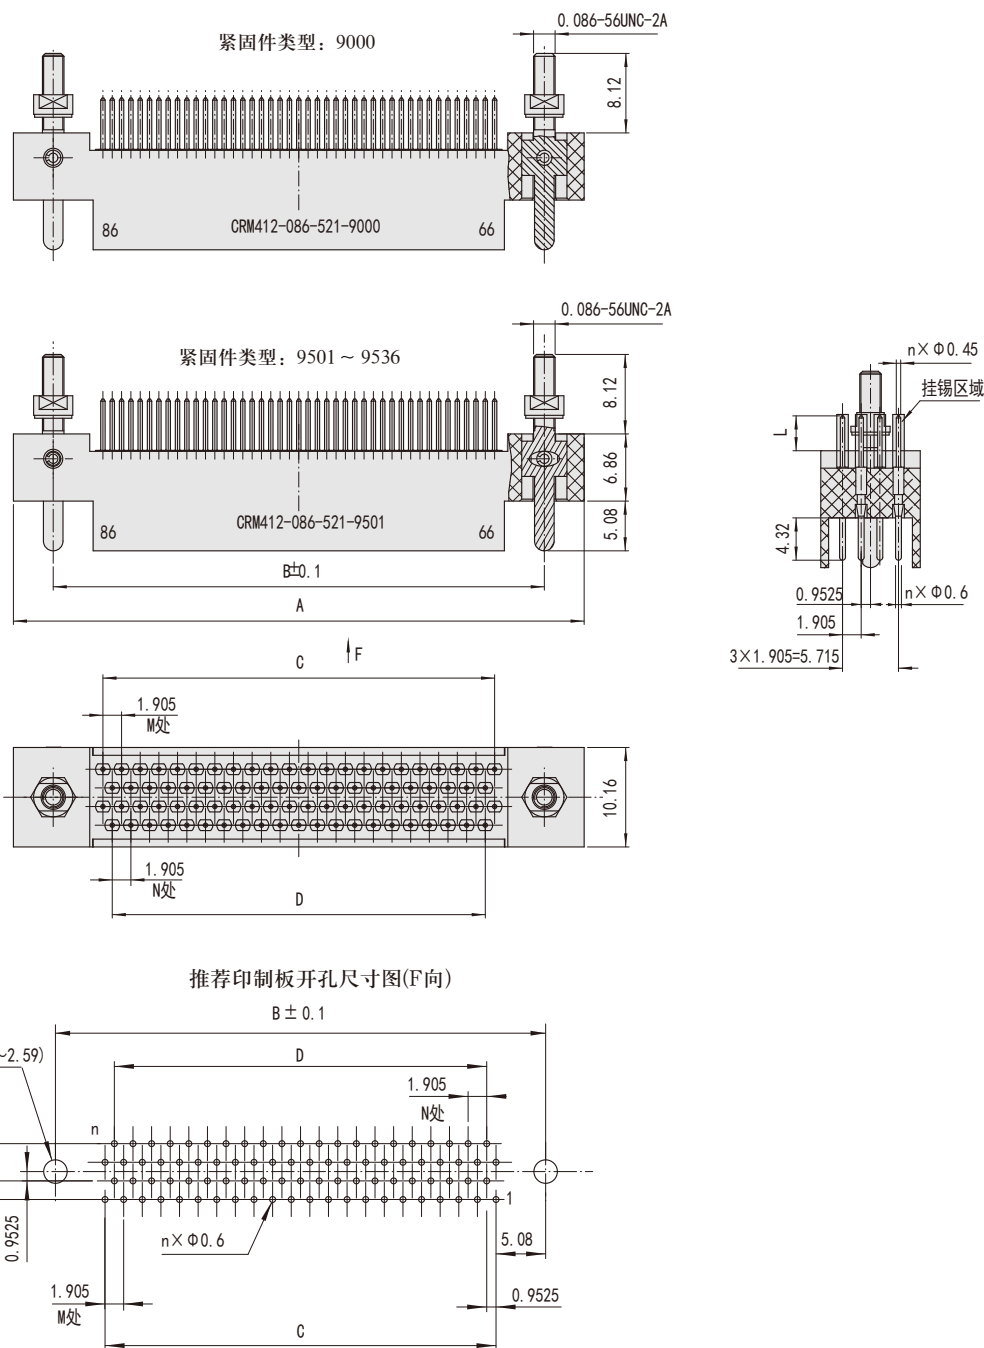

插头型号	尺寸表						
	A	B	C	D	M	N	n
CRM412-086-XX1-XXXX	58.29	50.16	40.005	38.1	21	20	86
CRM412-110-XX1-XXXX	69.72	61.6	51.435	49.53	27	26	110
CRM412-250-XX1-XXXX	136.4	128.27	118.11	116.205	62	61	250


接触件类型	尺寸	备注
	L	
51	2.77	印制板浸焊
52	3.56	
53	4.37	
54	6.35	

CRM4系列、CRM6系列矩形电连接器



CRM4系列

弯式插头

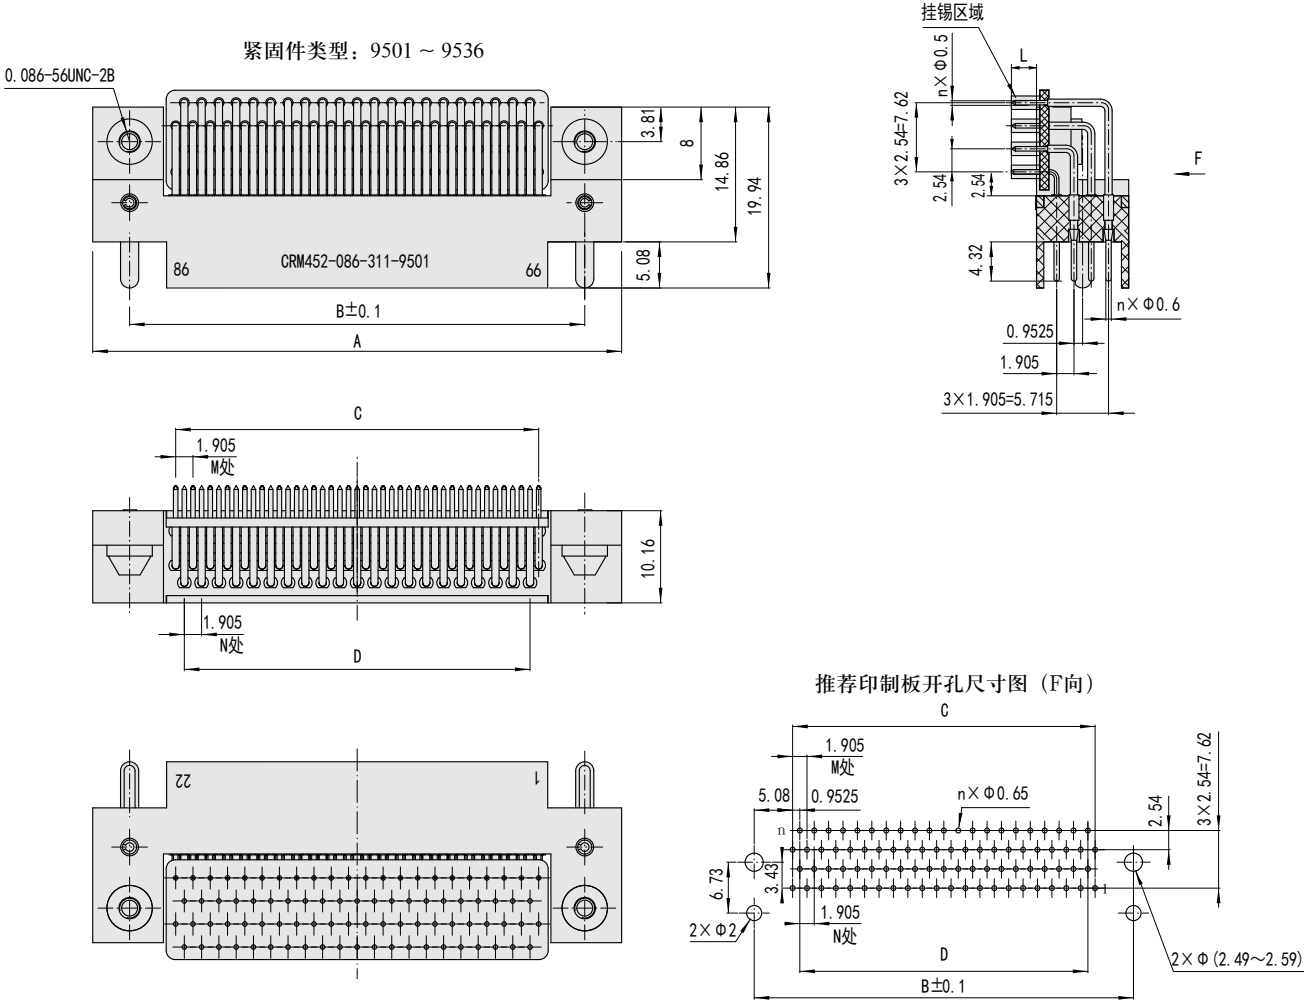

芯数	节点排列	芯数	节点排列	芯数	节点排列
86		110		250	

说明：当用户订购紧固件代号为9500的产品时，产品紧固件散件供货


插头型号	尺寸表							接触件类型	尺寸	备注
	A	B	C	D	M	N	n		L	
CRM452-086-XX1-XXXX	58.29	50.16	40.005	38.1	21	20	86	31	2.77	印制板浸焊
CRM452-110-XX1-XXXX	69.72	61.6	51.435	49.53	27	26	110	32	3.56	
CRM452-250-XX1-XXXX	136.4	128.27	118.11	116.205	62	61	250	33	4.37	

CRM4系列、CRM6系列矩形电连接器



CRM4系列

弯式插头

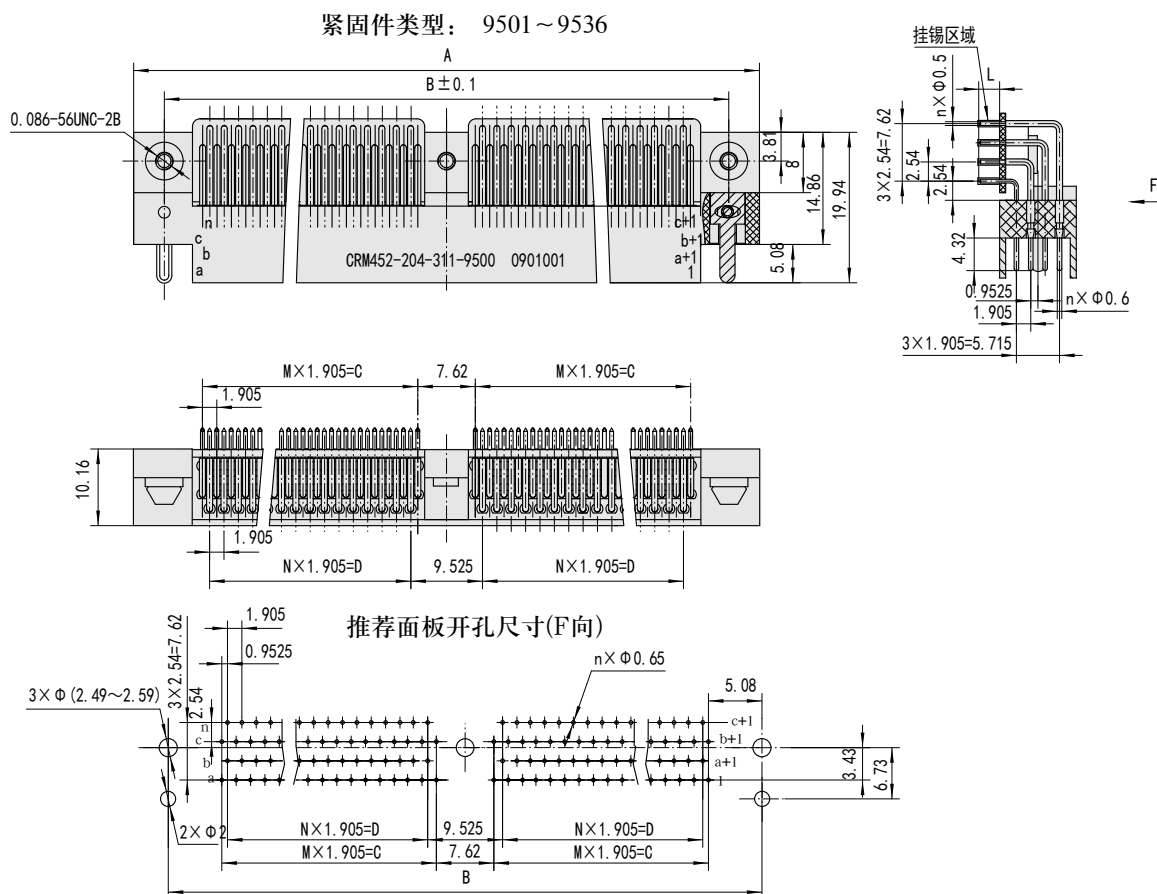

芯数	节点排列			
204	204 203 202 154 153 152 102 101 100 52 51 50	182 181 180 131 130 129 80 79 78 29 28 27	179 178 177 128 127 126 77 76 75 26 25 24	157 156 155 105 104 103 55 54 53 3 2 1
276	276 275 274 208 207 206 138 137 136 70 69 68	245 244 243 176 175 174 107 106 105 38 37 36	242 241 240 173 172 171 104 103 102 35 34 33	211 210 209 141 140 139 73 72 71 3 2 1
300	300 299 298 226 225 224 150 149 148 76 75 74	266 265 264 191 190 189 116 115 114 41 40 39	263 262 261 188 187 186 113 112 111 38 37 36	229 228 227 153 152 151 79 78 77 3 2 1

说明: 当用户订购紧固件代号为9500的产品时, 产品紧固件散件供货。

插头型号	尺寸表									
	A	B	C	D	M	N	a	b	c	n
CRM452-164-XX1-XXXX	102.11	93.98	38.1	36.195	20	19	42	82	124	164
CRM452-204-XX1-XXXX	121.16	113.03	47.625	45.72	25	24	52	102	154	204
CRM452-276-XX1-XXXX	155.4	147.3	64.77	62.865	34	33	70	138	208	276
CRM452-300-XX1-XXXX	166.88	158.75	70.485	68.58	37	36	76	150	226	300

接触件类型	尺寸	备注
	L	
31	2.77	印制板浸焊
32	3.56	
33	4.37	
34	6.35	


泰兴市领航电连接器有限公司

地址: 江苏省泰兴市文昌西路71号 网址: www.txsh.com
电话: 0523-87596158 传真: 0523-87599876



CRM4系列

直式插座

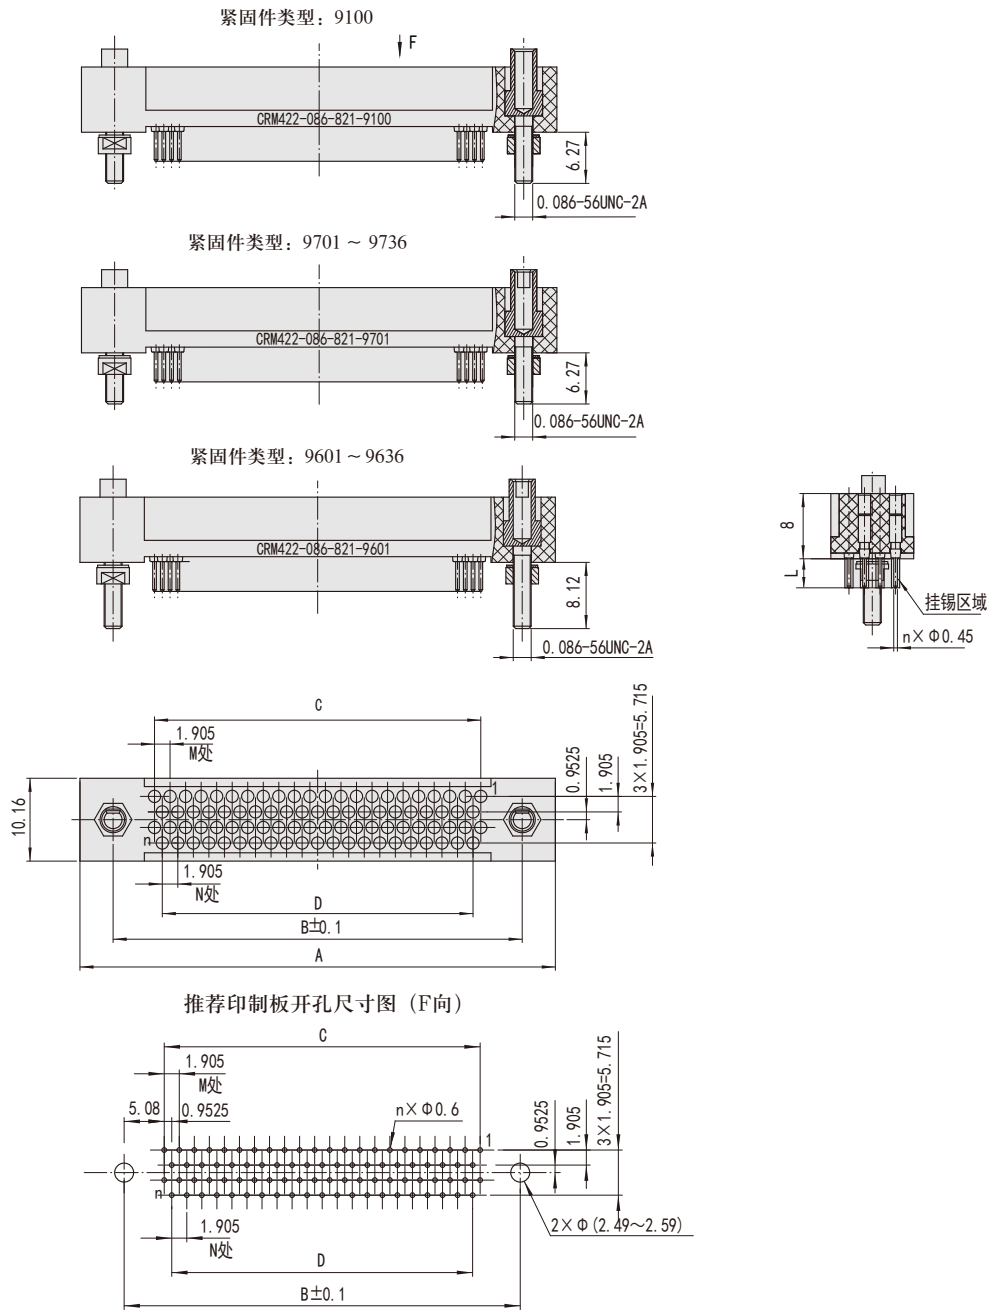

说明：当用户订购紧固件代号为9600、9700的产品时，产品紧固件散件供货


插座型号	尺寸表						
	A	B	C	D	M	N	n
CRM422-086-XX1-XXXX	58.29	50.16	40.005	38.1	21	20	86
CRM422-110-XX1-XXXX	69.72	61.6	51.435	49.53	27	26	110
CRM422-250-XX1-XXXX	136.4	128.27	118.11	116.205	62	61	250

接触件类型	尺寸	备注
	L	
75	6.35	印制板浸焊
81	2.77	
82	3.56	
83	4.37	



CRM4系列

直式插座

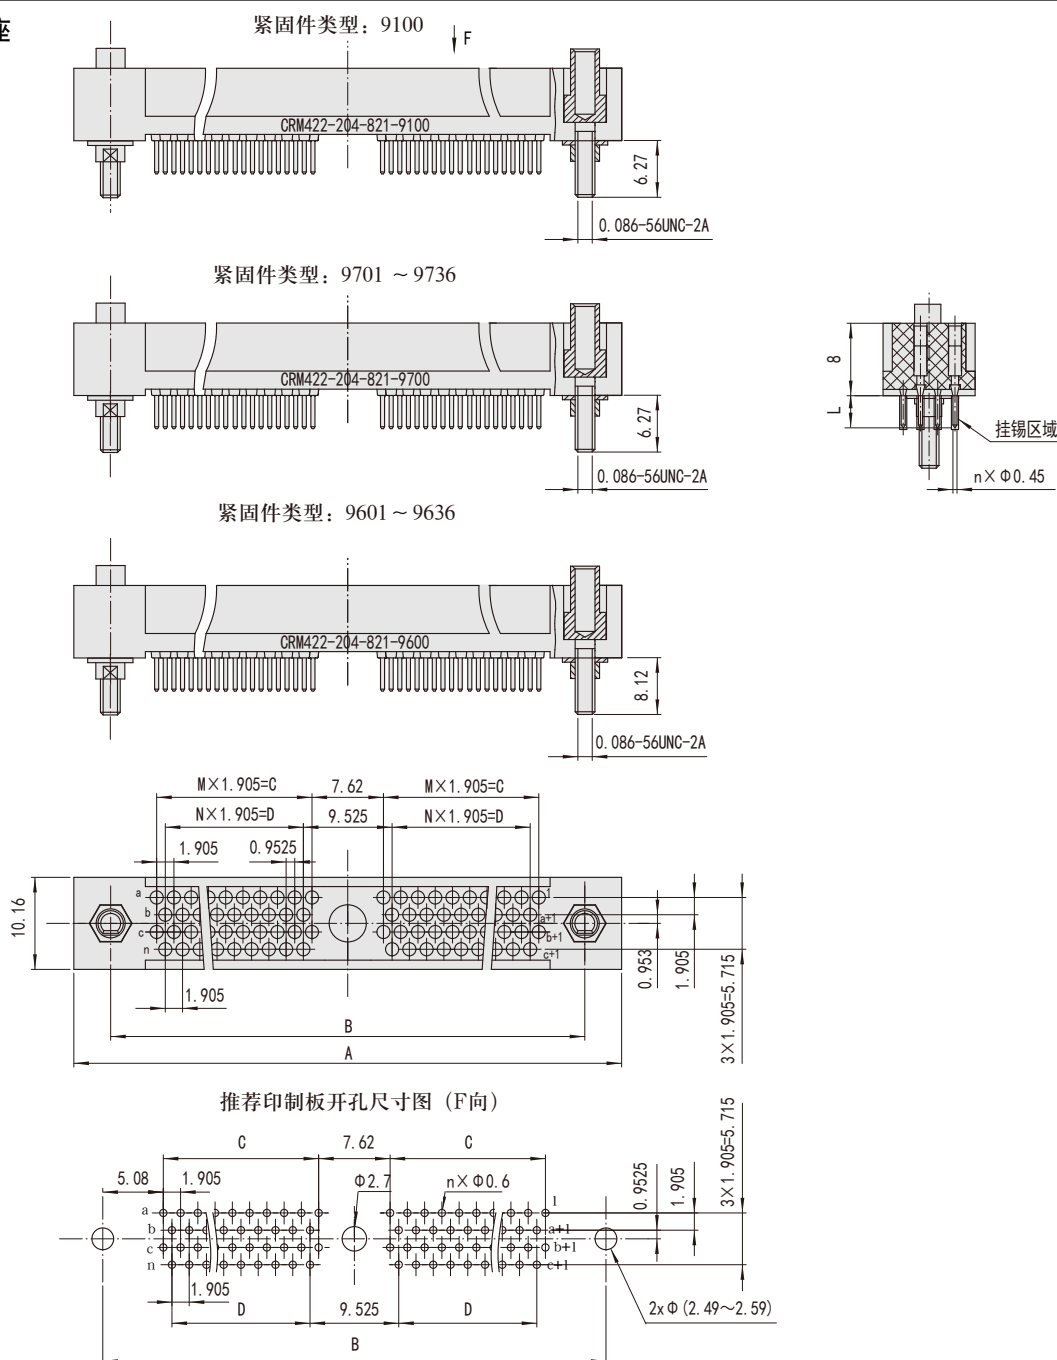


说明: 当用户订购紧固件代号为9600、9700的产品时, 产品紧固件散件供货

插座型号	尺寸表										接触件类型	尺寸	备注
	A	B	C	D	M	N	a	b	c	n		L	
CRM422-204-XX1-XXXX	121.16	113.03	47.625	45.72	25	24	52	102	154	204	75	6.35	印制板浸焊
CRM422-276-XX1-XXXX	155.4	147.32	64.77	62.865	34	33	70	138	208	276	81	2.77	
CRM422-300-XX1-XXXX	166.88	158.75	70.485	68.58	37	36	76	150	226	300	82	3.56	
											83	4.37	



CRM4系列

弯式插座

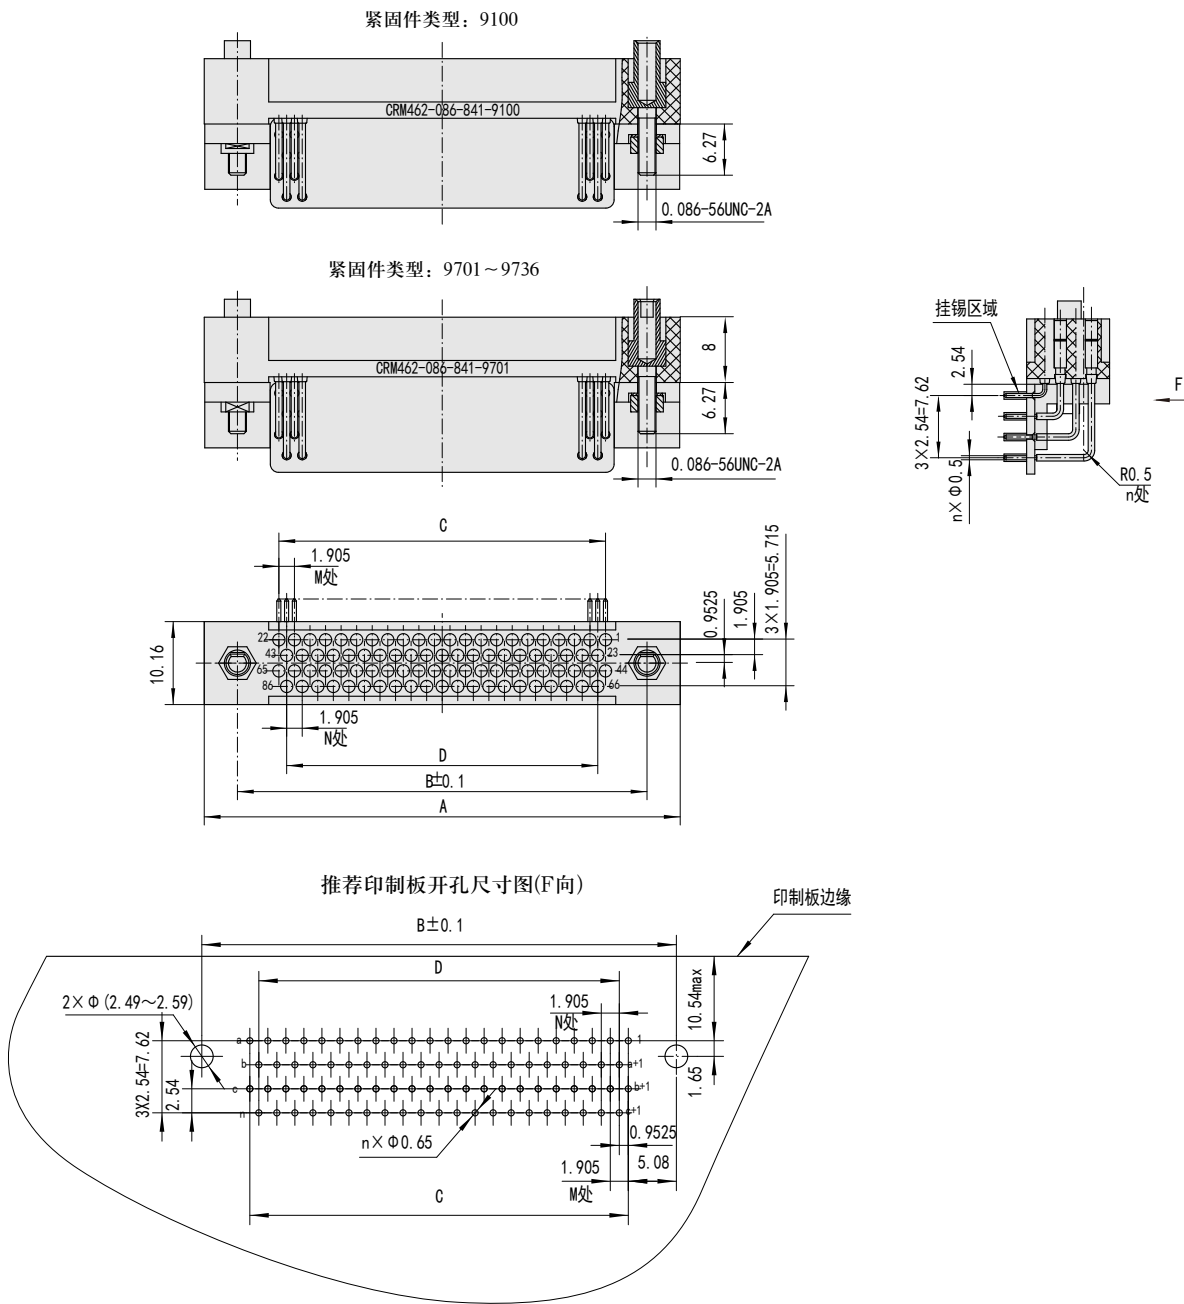

说明: 当用户订购紧固件代号为9700的产品时, 产品紧固件散件供货

插座型号	尺寸表									
	A	B	C	D	M	N	a	b	c	n
CRM462-086-XX1-XXXX	58.29	50.16	40.005	38.1	21	20	22	43	65	86
CRM462-110-XX1-XXXX	69.72	61.6	51.435	49.53	27	26	28	55	83	110
CRM462-250-XX1-XXXX	136.4	128.27	118.11	116.205	62	61	63	125	188	250


接触件类型	尺寸	备注
	L	
84	2.77	印制板浸焊
85	3.56	
86	4.37	






CRM4系列

弯式插座

紧固件类型：9100



紧固件类型：9701~9736

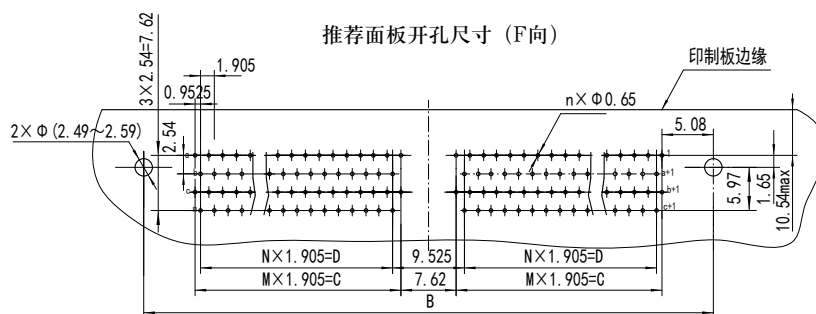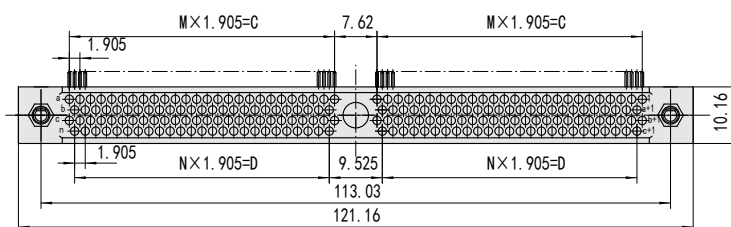

推荐面板开孔尺寸 (F向)

说明：当用户订购紧固件代号为9700的产品时，产品紧固件散件供货


插头型号	尺寸表									
	A	B	C	D	M	N	a	b	c	n
CRM462-204-XX1-XXXX	121.16	113.03	47.625	45.72	25	24	52	102	154	204
CRM462-276-XX1-XXXX	155.4	147.32	64.77	62.865	34	33	70	138	208	276
CRM462-300-XX1-XXXX	166.88	158.75	70.485	68.58	37	36	76	150	226	300

接触件类型	尺寸	备注
	L	
84	2.77	印制板浸焊
85	3.56	
86	4.37	




CRM6系列

直式插头

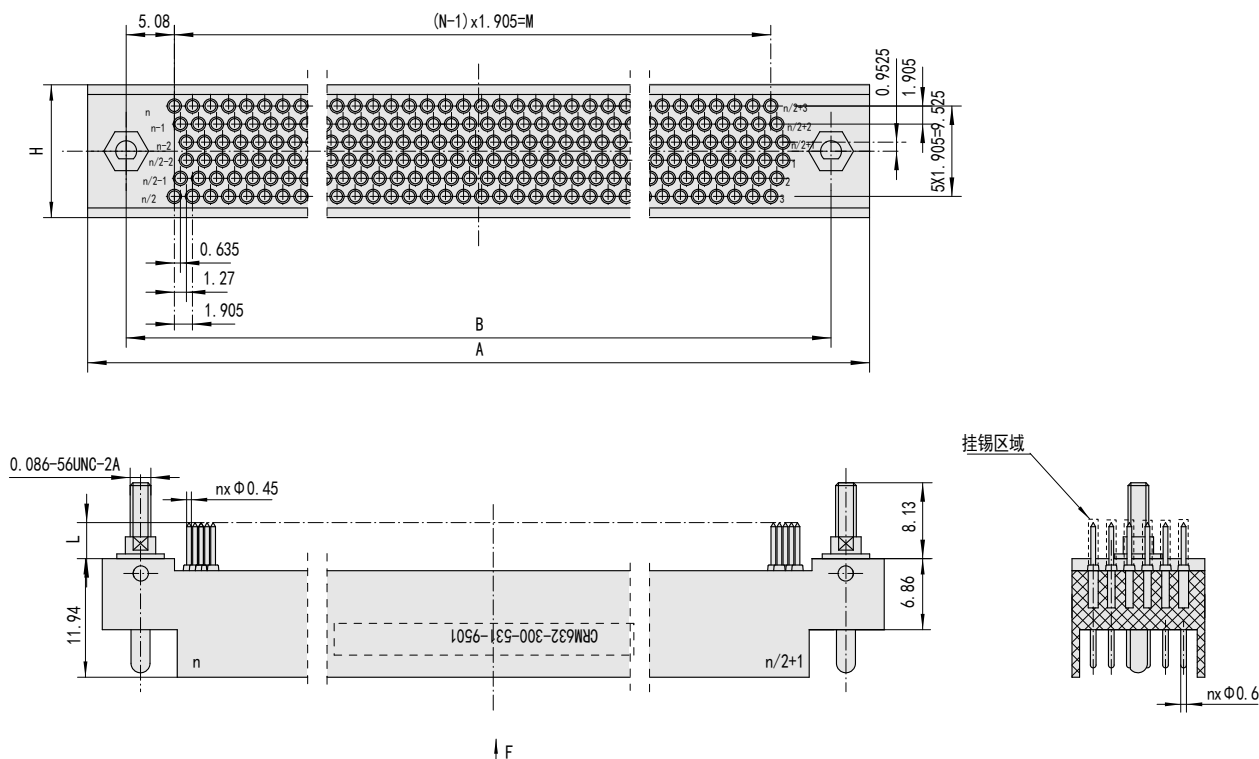

推荐印制板开孔尺寸图 (F向)

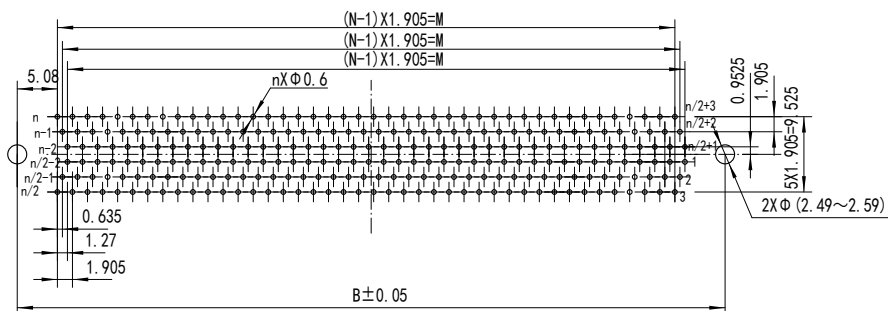


插头型号	尺寸表					
	A	B	H	M	N	n
CRM632-204-XX1-XXXX	82.4	74.295	13.97	62.865	34	204
CRM632-252-XX1-XXXX	97.7	89.535	13.97	78.105	42	252
CRM632-300-XX1-XXXX	112.9	104.775	15.47	93.345	50	300
CRM632-360-XX1-XXXX	132	123.825	15.47	112.395	60	360
CRM632-402-XX1-XXXX	145.3	137.16	15.47	125.73	67	402

接触件类型	尺寸	备注
	L	
51	2.77	印制板浸焊
52	3.56	
53	4.37	
54	6.35	




CRM6系列

直式插头

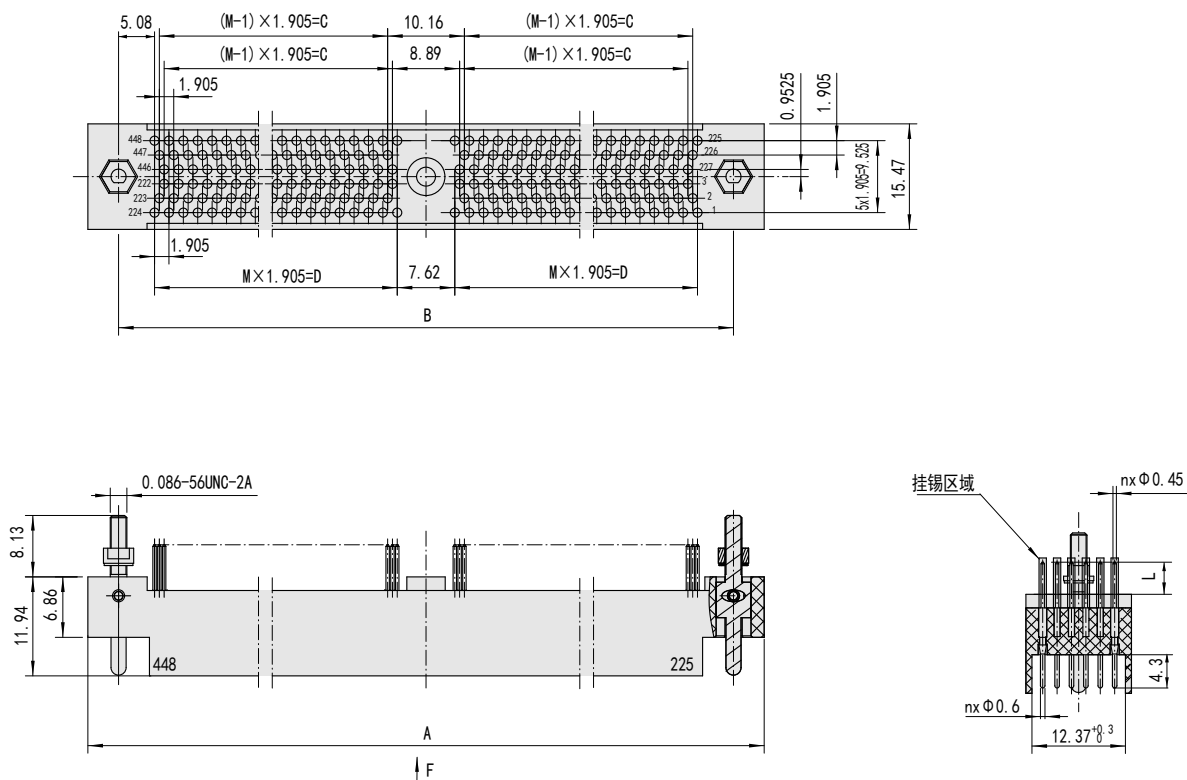

推荐印制板开孔尺寸图 (F向)

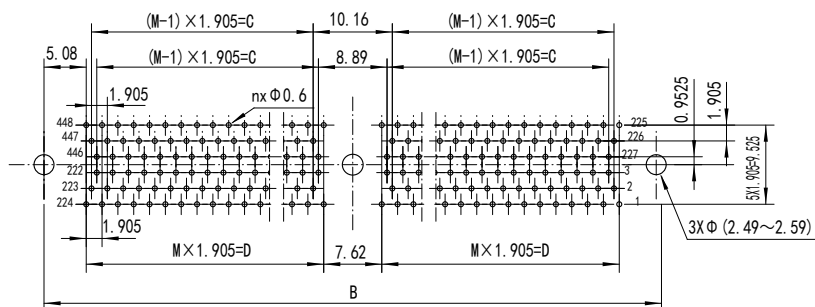

说明：当用户订购紧固件代号为9500的产品时，产品紧固件散件供货

插头型号	尺寸表						接触件类型	尺寸	备注
	A	B	C	D	M	n		L	
CRM612-448-XX1-XXXX	166.9	158.75	68.58	70.485	37	448	84	2.77	印制板浸焊
							85	3.56	
							86	4.37	


16



CRM6系列

弯式插头

“-01”型弯式插头

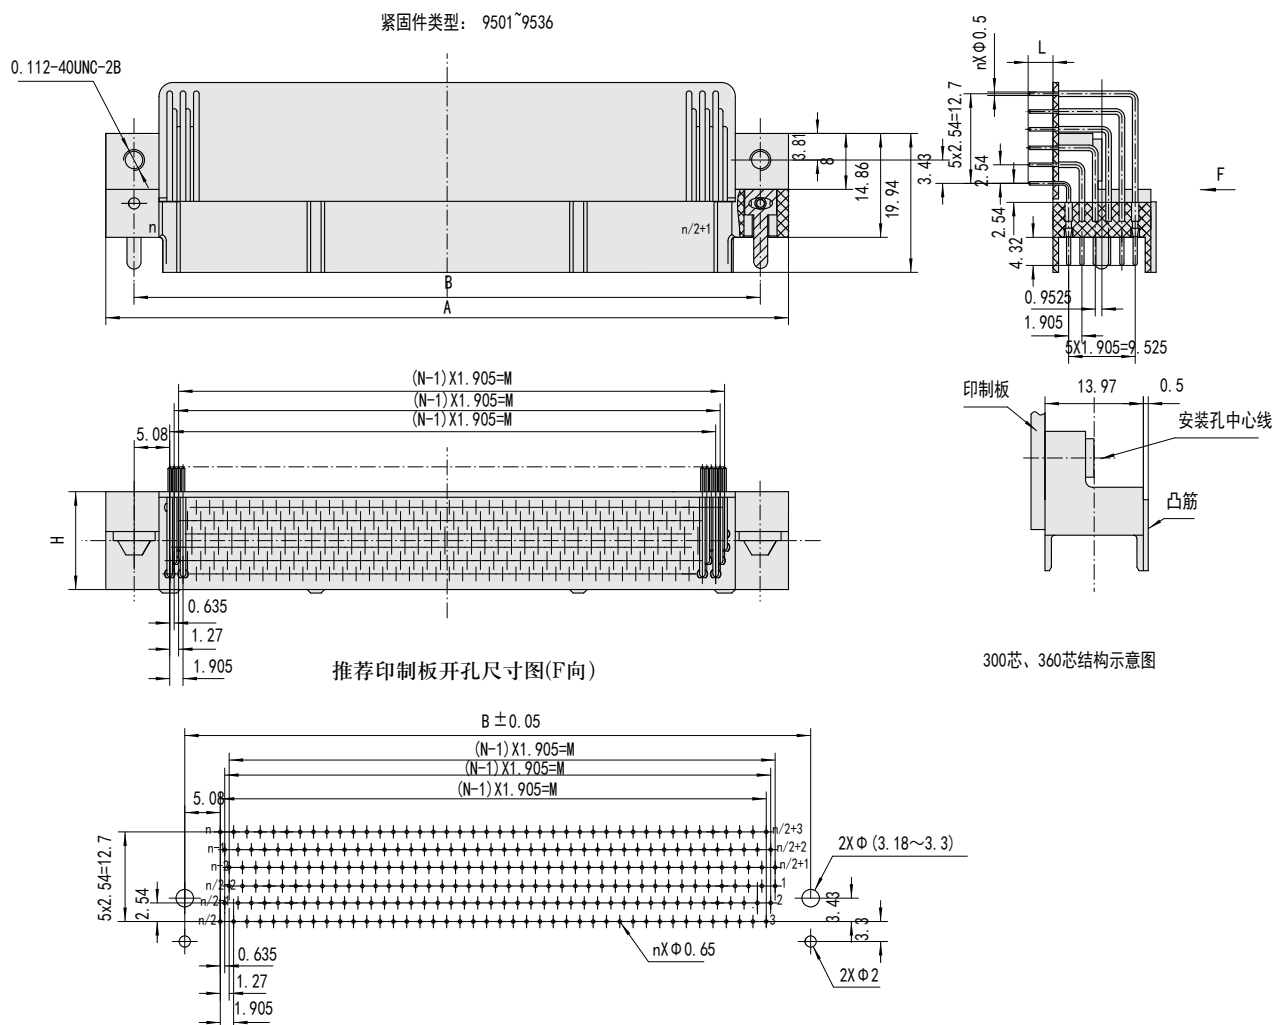

说明: 当用户订购紧固件代号为9500的产品时, 产品紧固件散件供货


插头型号	尺寸表					
	A	B	H	M	N	n
CRM672-300-XX1-XXXX-01	112.9	104.775	13.97	93.345	50	300
CRM672-360-XX1-XXXX-01	132	123.825	13.97	112.395	60	360

接触件类型	尺寸	备注
	L	
31	2.77	印制板浸焊
32	3.56	
33	4.37	
34	6.35	



CRM6系列

直式插座

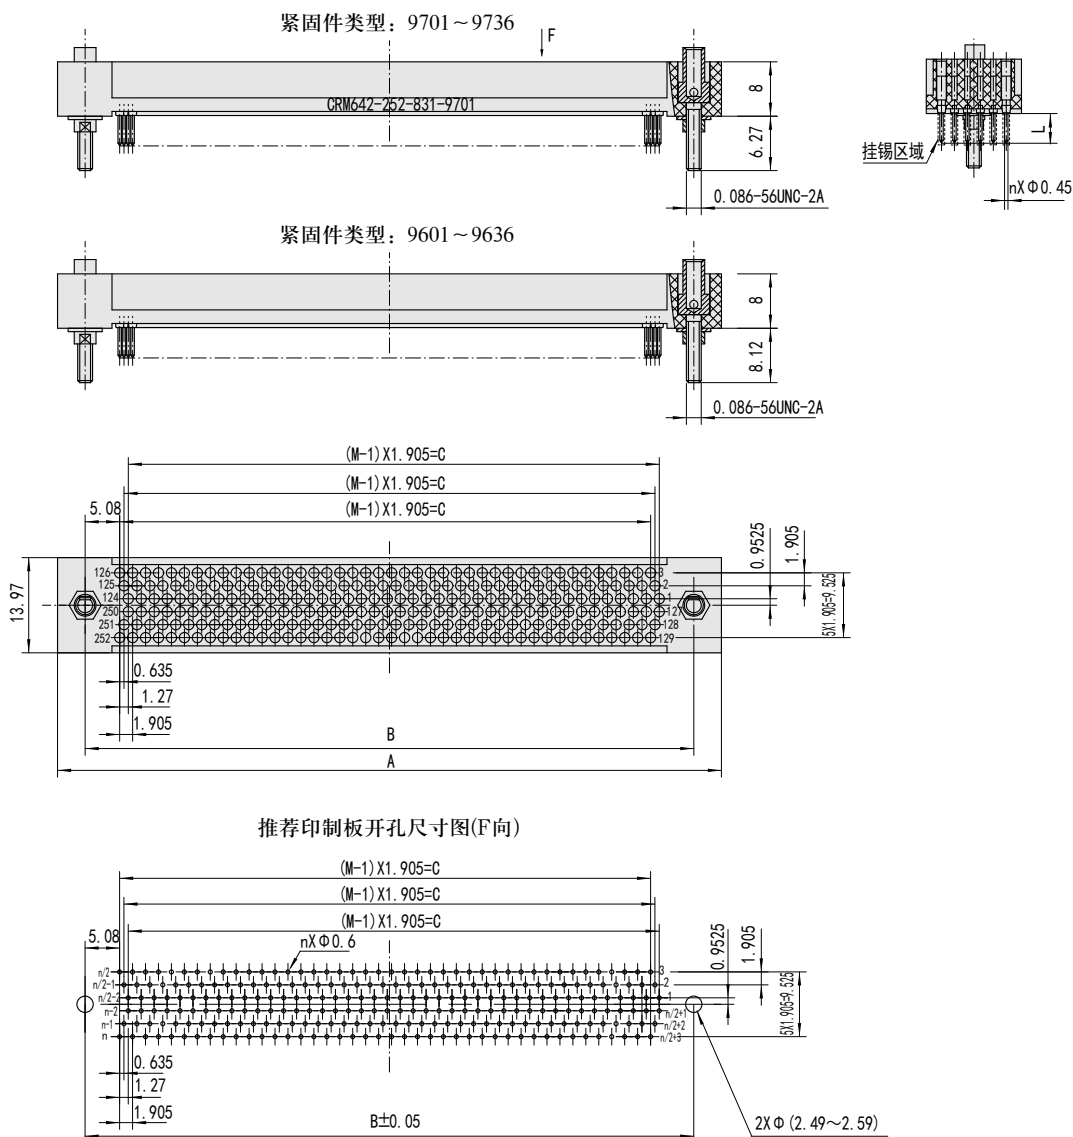

说明：当用户订购紧固件代号为9600、9700的产品时，产品紧固件散件供货


插座型号	尺寸表				
	A	B	C	M	n
CRM642-162-XX1-XXXX	69.09	60.96	49.53	27	162
CRM642-204-XX1-XXXX	82.4	74.295	62.865	34	204
CRM642-252-XX1-XXXX	97.7	89.535	78.105	42	252
CRM642-300-XX1-XXXX	112.9	104.775	93.345	50	300
CRM642-360-XX1-XXXX	132	123.825	112.395	60	360
CRM642-402-XX1-XXXX	145.3	137.16	125.73	67	402

接触件类型	尺寸	备注
	L	
81	2.77	印制板浸焊
82	3.56	
83	4.37	
75	6.35	



CRM6系列

弯式插座

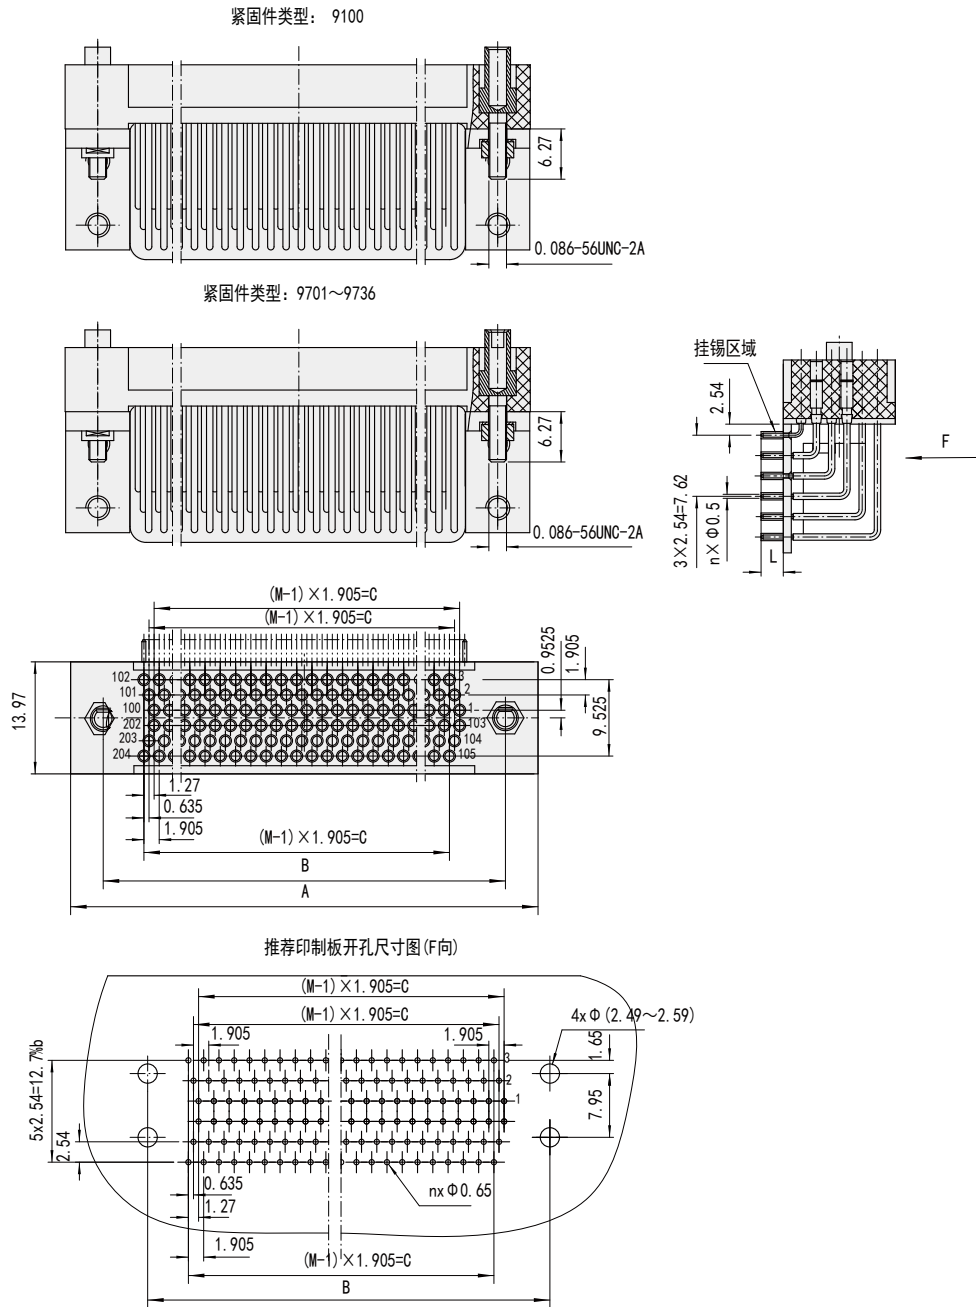


插座型号	尺寸表					接触件类型	尺寸	备注
	A	B	C	M	n		L	
CRM682-204-XX1-XXXX	82.4	74.295	62.865	34	204			
CRM682-252-XX1-XXXX	97.7	89.535	78.105	42	252	84	2.77	印制板浸焊
CRM682-300-XX1-XXXX	112.9	104.775	93.345	50	300	85	3.56	
CRM682-360-XX1-XXXX	132	123.825	112.395	60	360			
CRM682-402-XX1-XXXX	145.3	137.16	125.73	67	402	86	4.37	




CRM6系列

弯式插头

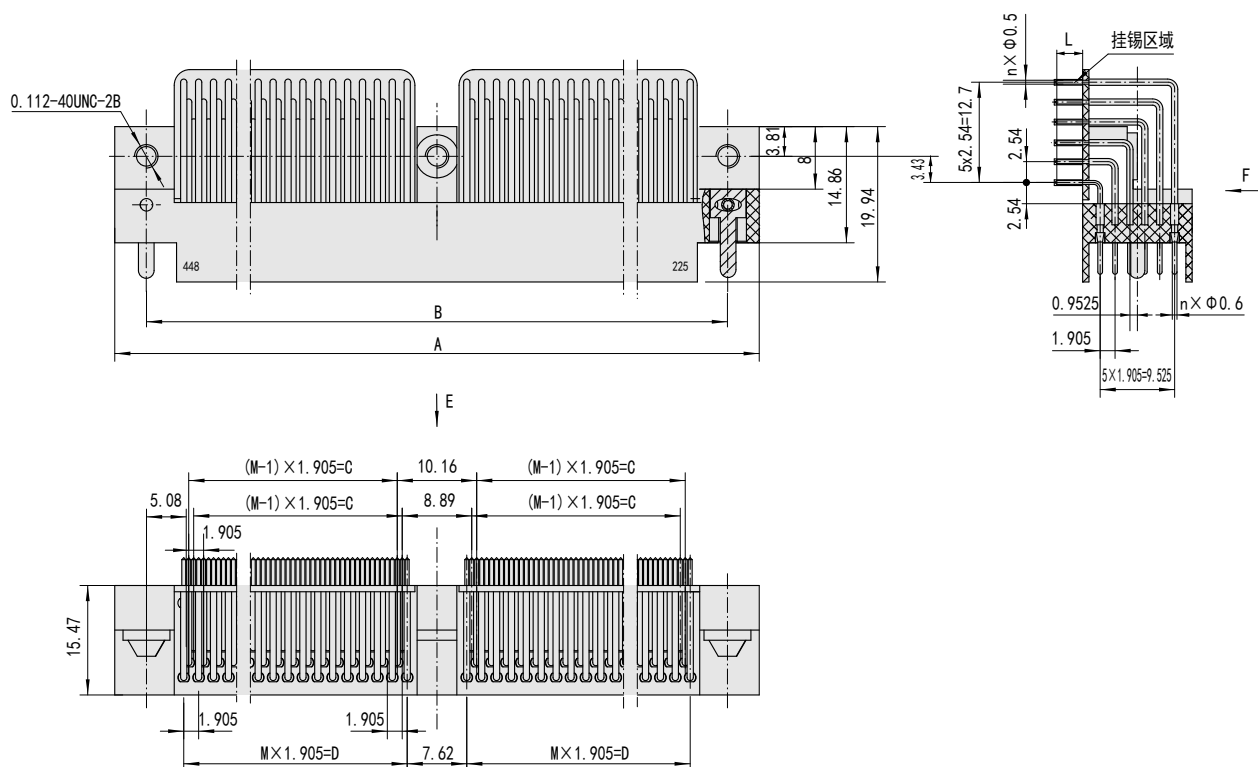

推荐印制板开孔尺寸图(F向)

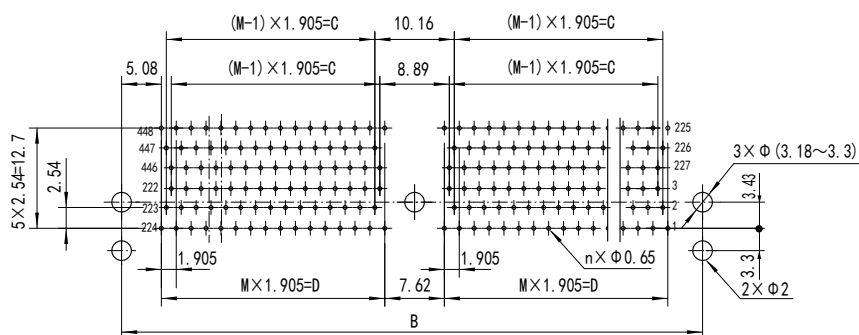

说明：当用户订购紧固件代号为9500的产品时，产品紧固件散件供货

插头型号	尺寸表					
	A	B	C	D	M	n
CRM652-448-XX1-XXXX	166.9	158.75	68.58	70.485	37	448


接触件类型	尺寸	备注
	L	
31	2.77	印制板浸焊
32	3.56	
33	4.37	
34	6.35	




CRM6系列

直式插座




紧固件类型: 9100

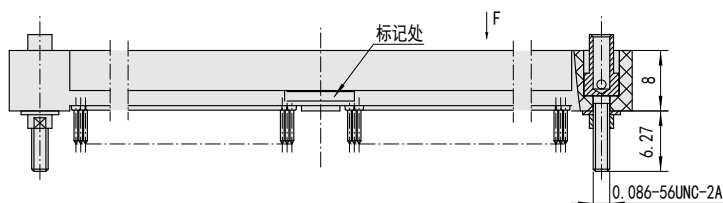


紧固件类型: 9701~9736

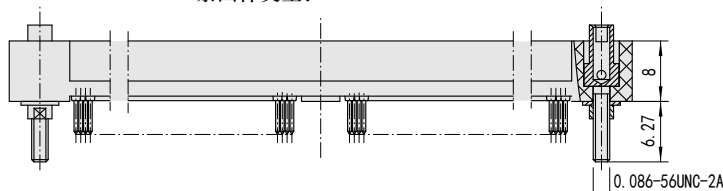

紧固件类型: 9601~9636

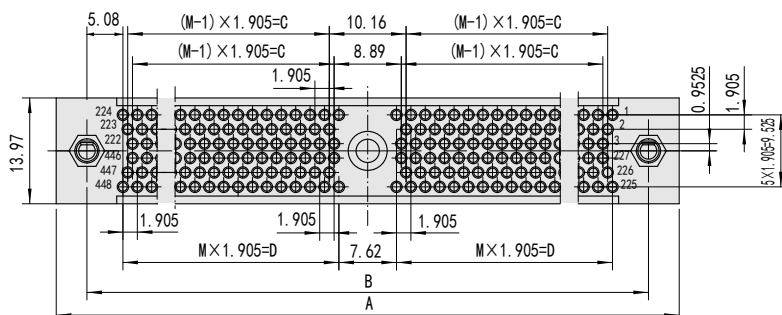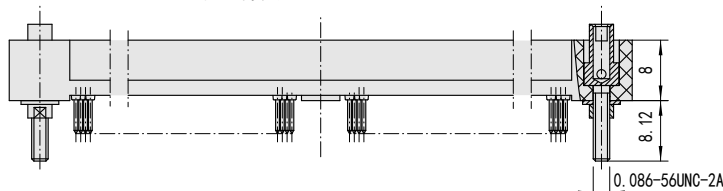

推荐印制板开孔尺寸图(F向)

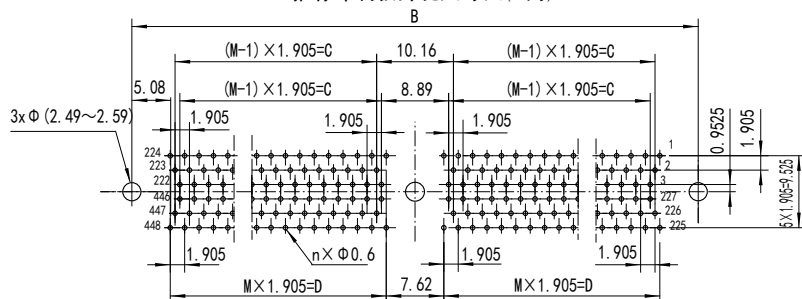

说明: 当用户订购紧固件代号为9600、9700的产品时, 产品紧固件散件供货

插座型号	尺寸表					
	A	B	C	D	M	n
CRM622-448-XX1-XXXX	166.9	158.75	68.58	70.485	37	448

接触件类型	尺寸	备注
	L	
81	2.77	印制板浸焊
82	3.56	
83	4.37	



芯数	节点排列	芯数	节点排列						
204	204 201 198 203 200 197 202 199 196 100 97 94 101 98 95 102 99 96 111 108 105 110 107 104 109 106 103 7 4 1 8 5 2 9 6 3 252	252 249 246 251 248 245 250 247 244 124 121 118 125 122 119 126 123 120 135 132 129 134 131 128 133 130 127 7 4 1 8 5 2 9 6 3 <tr><td>300</td><td> 300 297 294 299 296 293 298 295 292 148 145 142 149 146 143 150 147 144 159 156 153 158 155 152 157 154 151 7 4 1 8 5 2 9 6 3 360 </td><td> 360 357 354 359 356 353 358 355 352 178 175 172 179 176 173 180 177 174 189 186 183 188 185 182 187 184 181 7 4 1 8 5 2 9 6 3 <tr><td>402</td><td> 402 399 396 401 398 395 400 397 394 199 196 193 200 197 194 201 198 195 210 207 204 209 206 203 208 205 202 7 4 1 8 5 2 9 6 3 <tr><td>448</td><td> 448 445 442 447 444 441 446 443 440 222 219 216 223 220 217 224 221 218 343 340 337 345 342 339 344 341 338 120 117 114 121 118 115 119 116 113 336 333 330 334 331 328 335 332 332 111 108 105 110 107 104 112 109 106 231 228 225 232 229 226 233 230 227 9 6 3 8 5 2 7 4 1 </td></tr></td></tr></td></tr>	300	300 297 294 299 296 293 298 295 292 148 145 142 149 146 143 150 147 144 159 156 153 158 155 152 157 154 151 7 4 1 8 5 2 9 6 3 360	360 357 354 359 356 353 358 355 352 178 175 172 179 176 173 180 177 174 189 186 183 188 185 182 187 184 181 7 4 1 8 5 2 9 6 3 <tr><td>402</td><td> 402 399 396 401 398 395 400 397 394 199 196 193 200 197 194 201 198 195 210 207 204 209 206 203 208 205 202 7 4 1 8 5 2 9 6 3 <tr><td>448</td><td> 448 445 442 447 444 441 446 443 440 222 219 216 223 220 217 224 221 218 343 340 337 345 342 339 344 341 338 120 117 114 121 118 115 119 116 113 336 333 330 334 331 328 335 332 332 111 108 105 110 107 104 112 109 106 231 228 225 232 229 226 233 230 227 9 6 3 8 5 2 7 4 1 </td></tr></td></tr>	402	402 399 396 401 398 395 400 397 394 199 196 193 200 197 194 201 198 195 210 207 204 209 206 203 208 205 202 7 4 1 8 5 2 9 6 3 <tr><td>448</td><td> 448 445 442 447 444 441 446 443 440 222 219 216 223 220 217 224 221 218 343 340 337 345 342 339 344 341 338 120 117 114 121 118 115 119 116 113 336 333 330 334 331 328 335 332 332 111 108 105 110 107 104 112 109 106 231 228 225 232 229 226 233 230 227 9 6 3 8 5 2 7 4 1 </td></tr>	448	448 445 442 447 444 441 446 443 440 222 219 216 223 220 217 224 221 218 343 340 337 345 342 339 344 341 338 120 117 114 121 118 115 119 116 113 336 333 330 334 331 328 335 332 332 111 108 105 110 107 104 112 109 106 231 228 225 232 229 226 233 230 227 9 6 3 8 5 2 7 4 1
300	300 297 294 299 296 293 298 295 292 148 145 142 149 146 143 150 147 144 159 156 153 158 155 152 157 154 151 7 4 1 8 5 2 9 6 3 360	360 357 354 359 356 353 358 355 352 178 175 172 179 176 173 180 177 174 189 186 183 188 185 182 187 184 181 7 4 1 8 5 2 9 6 3 <tr><td>402</td><td> 402 399 396 401 398 395 400 397 394 199 196 193 200 197 194 201 198 195 210 207 204 209 206 203 208 205 202 7 4 1 8 5 2 9 6 3 <tr><td>448</td><td> 448 445 442 447 444 441 446 443 440 222 219 216 223 220 217 224 221 218 343 340 337 345 342 339 344 341 338 120 117 114 121 118 115 119 116 113 336 333 330 334 331 328 335 332 332 111 108 105 110 107 104 112 109 106 231 228 225 232 229 226 233 230 227 9 6 3 8 5 2 7 4 1 </td></tr></td></tr>	402	402 399 396 401 398 395 400 397 394 199 196 193 200 197 194 201 198 195 210 207 204 209 206 203 208 205 202 7 4 1 8 5 2 9 6 3 <tr><td>448</td><td> 448 445 442 447 444 441 446 443 440 222 219 216 223 220 217 224 221 218 343 340 337 345 342 339 344 341 338 120 117 114 121 118 115 119 116 113 336 333 330 334 331 328 335 332 332 111 108 105 110 107 104 112 109 106 231 228 225 232 229 226 233 230 227 9 6 3 8 5 2 7 4 1 </td></tr>	448	448 445 442 447 444 441 446 443 440 222 219 216 223 220 217 224 221 218 343 340 337 345 342 339 344 341 338 120 117 114 121 118 115 119 116 113 336 333 330 334 331 328 335 332 332 111 108 105 110 107 104 112 109 106 231 228 225 232 229 226 233 230 227 9 6 3 8 5 2 7 4 1			
402	402 399 396 401 398 395 400 397 394 199 196 193 200 197 194 201 198 195 210 207 204 209 206 203 208 205 202 7 4 1 8 5 2 9 6 3 <tr><td>448</td><td> 448 445 442 447 444 441 446 443 440 222 219 216 223 220 217 224 221 218 343 340 337 345 342 339 344 341 338 120 117 114 121 118 115 119 116 113 336 333 330 334 331 328 335 332 332 111 108 105 110 107 104 112 109 106 231 228 225 232 229 226 233 230 227 9 6 3 8 5 2 7 4 1 </td></tr>	448	448 445 442 447 444 441 446 443 440 222 219 216 223 220 217 224 221 218 343 340 337 345 342 339 344 341 338 120 117 114 121 118 115 119 116 113 336 333 330 334 331 328 335 332 332 111 108 105 110 107 104 112 109 106 231 228 225 232 229 226 233 230 227 9 6 3 8 5 2 7 4 1						
448	448 445 442 447 444 441 446 443 440 222 219 216 223 220 217 224 221 218 343 340 337 345 342 339 344 341 338 120 117 114 121 118 115 119 116 113 336 333 330 334 331 328 335 332 332 111 108 105 110 107 104 112 109 106 231 228 225 232 229 226 233 230 227 9 6 3 8 5 2 7 4 1								



CRM4、CRM6系列可以安装的可识别紧固件类型（视图方向为插合面视图方向）

紧固件 代号	插 头	插 座	紧固件 代号	插 头	插 座
01			19		
02			20		
03			21		
04			22		
05			23		
06			24		
07			25		
08			26		
09			27		
10			28		
11			29		
12			30		
13			31		
14			32		
15			33		
16			34		
17			35		
18			36		
说明 1#接触件位置					
	可识别导销		9500 9501~9536		
	导销		9500 9501~9536		
	可识别导套		9600 9601~9636 9700 9701~9736		
	导套		9100		